



1A Low Dropout Voltage Regulator With ON/OFF Control KIA78RXX


DESCRIPTIONS:


The KIA78RXX is a low drop voltage regulator suitable for various electronic equipment. The output current is up to 1.0A and dropout voltage is 0.5V typ. at $I_o=1.0A$. This regulator has various function such as peak current protection, thermal shut down, over voltage protection and output disable function. The KIA78RXX is available in TO-252-5L, TO-220F-4 power package.

FEATURES

- 1.0A output low drop voltage regulator.
- Built in ON/OFF control terminal.
- Built in over current protection, over heat protection function.


BLOCK DIAGRAM

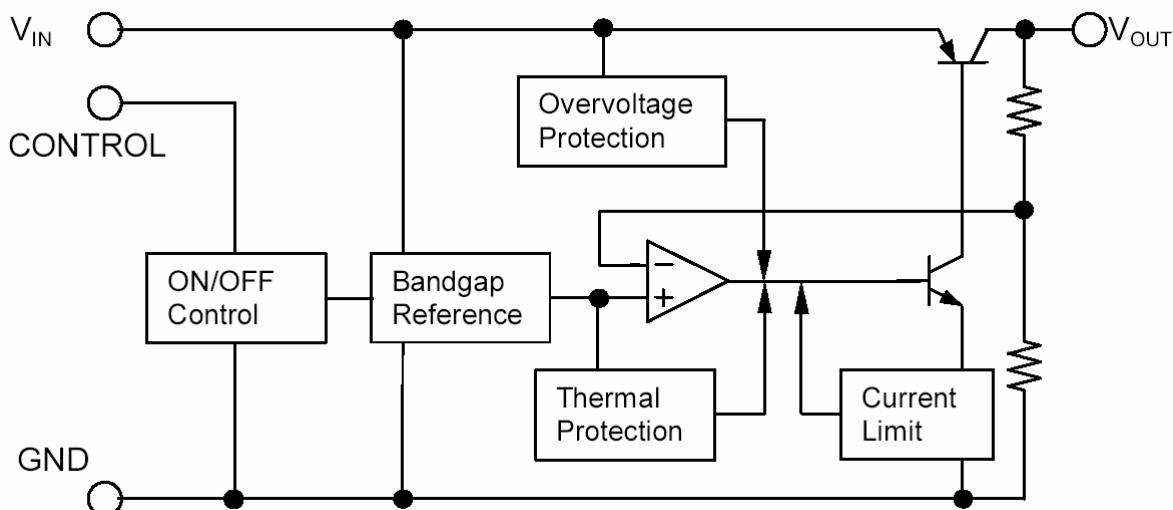

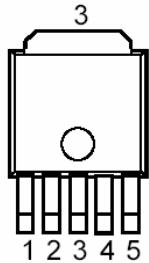PIN CONFIGURATION:

PIN FUNCTION

1. VIN
2. GND
3. VOUT
4. NC
5. ON/OFF CONTROL



PIN FUNCTION

1. V_{IN}
2. V_{OUT}
3. GND
4. ON/OFF CONTROL

ORDERING INFORMATION:

Package Marking	Output Voltage	Package Type
KIA78R25FXX	2.5V	TO-252-5L
KIA78R33FXX	3.3 V	TO-252-5L
KIA78R05FXX	5.0V	TO-252-5L
KIA78R06FXX	6.0V	TO-252-5L
KIA78R08FXX	8.0V	TO-252-5L
KIA78R09FXX	9.0 V	TO-252-5L
KIA78R10FXX	10.0V	TO-252-5L
KIA78R12FXX	12.0V	TO-252-5L
KIA78R15FXX	15.0V	TO-252-5L
KIA78R25API	2.5V	TO-220F-4
KIA78R33API	3.3 V	TO-220F-4
KIA78R05API	5.0V	TO-220F-4
KIA78R06API	6.0V	TO-220F-4
KIA78R08API	8.0V	TO-220F-4
KIA78R09API	9.0 V	TO-220F-4
KIA78R10API	10.0V	TO-220F-4
KIA78R12API	12.0V	TO-220F-4
KIA78R15API	15.0V	TO-220F-4

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Characteristic	Value	Unit
Input Voltage	35	V
ON/OFF Control Volatge	35	V

KIA78RXX

Output Current		1	A
Power Dissipation 1 (no heatsink)		1.5	W
Power Dissipation 2 (with heatsink)	TO-252-5L	10	W
	TO-220F-4	15	
Junction Temperature		125	°C
Operating Temperature		-20~80	°C
Storage Temperature		-30~125	°C
Soldering Temperature (10sec)		260	°C

ELECTRICAL CHARACTERISTICS

(unless otherwise specified: $I_o=0.5A$, $T_a=25^{\circ}C$)

Characteristics	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_{out}	Note1	-2% V_o		2% V_o	V
Load regulation	R_{load}	$I_o=5mA \sim 2A$		0.1	2.0	%
Line regulation	R_{line}	Note2		0.5	2.5	%
Temperature coefficient of output voltage	$T_c V_o$	$T_j=0 \sim 125^{\circ}C$		±0.02	±0.05	% / °C
Ripple rejection	R.R		45	55		dB
Drop out voltage	V_D	$I_o=1A$, Note3			0.5	V
Output ON state for control voltage	$V_{C(ON)}$		2.0			V
Output ON state for control current	$I_{C(ON)}$	$V_c=2.7V$			20	µA
Output OFF state for control voltage	$V_{C(OFF)}$				0.8	V
Output OFF state for control current	$I_{C(OFF)}$	$V_c=0.4V_o$			-0.4	mA
Quiescent current	I_Q	Note1, $I_o=0$			10	mA


Note:

KIA78RXX


	Note1	Note2	Note3
KIA78R25	VIN=4.5V	Vin=3.5~9.5V	Vout=0.95Vo
KIA78R33	Vin=5.0V	Vin=4.3~10.3V	
KIA78R05	Vin=7.0V	Vin=6~12V	
KIA78R06	Vin=8.0V	Vin=7~15V	
KIA78R08	Vin=10V	Vin=9~25V	
KIA78R09	Vin=15V	Vin=10~25V	
KIA78R10	Vin=16V	Vin=11~26V	
KIA78R12	Vin=18V	Vin=13~29V	
KIA78R15	Vin=21V	Vin=16~32V	


TEST CIRCUIT


Standard Test Circuit

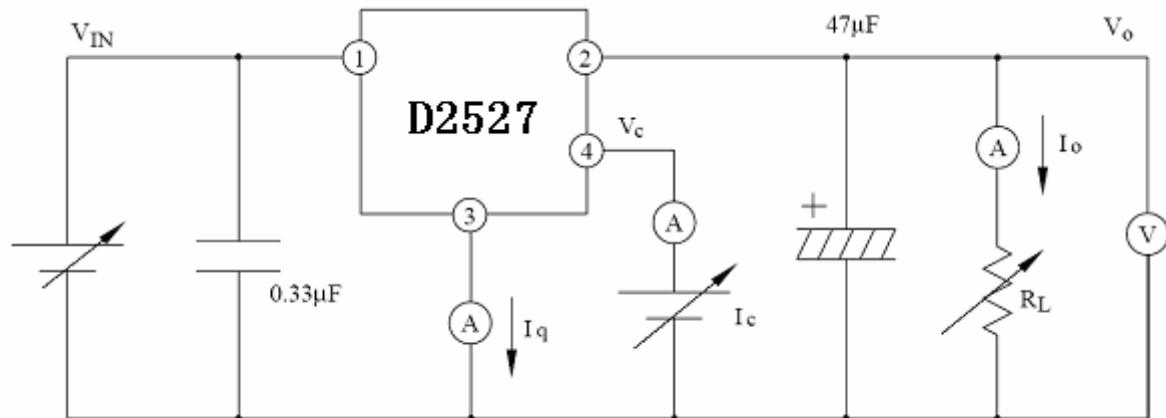

Ripple Rejection Test Circuit

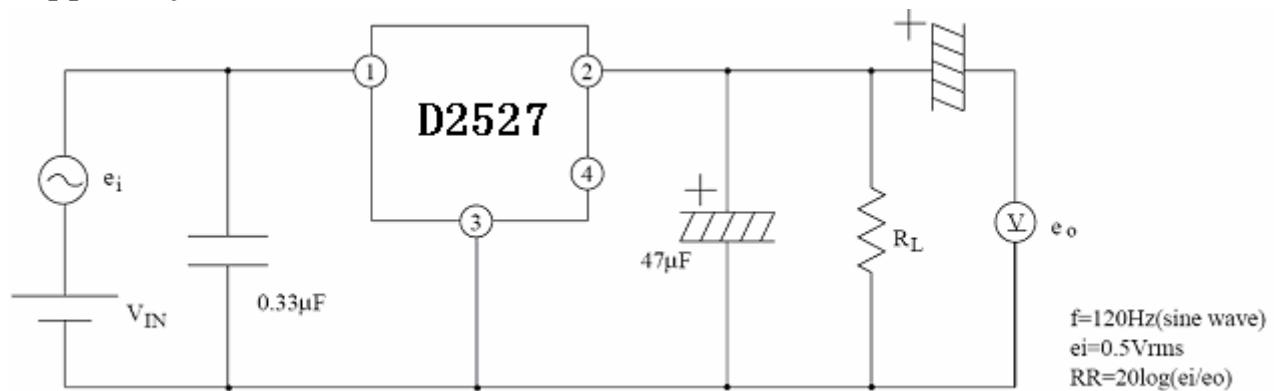

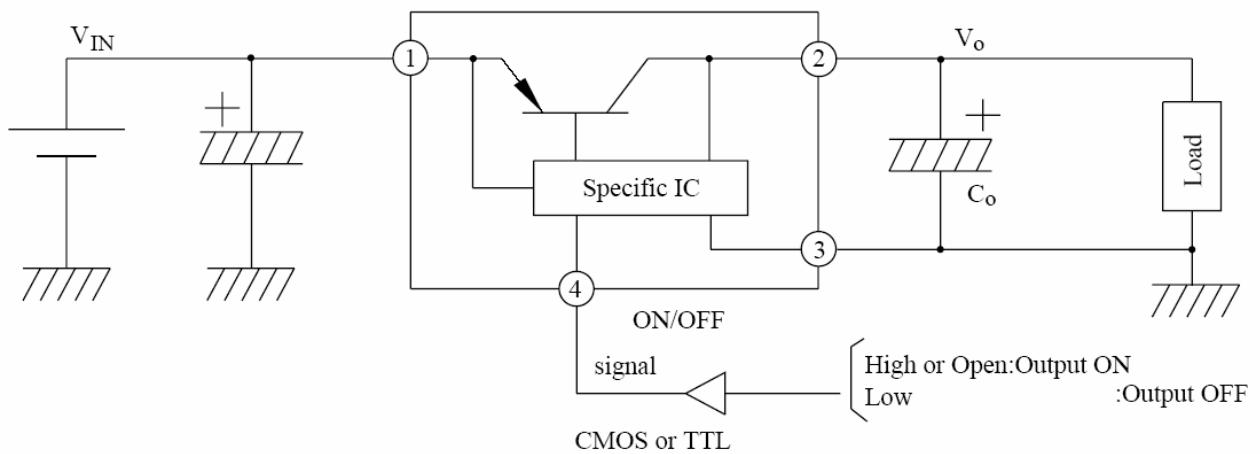APPLICATION CIRCUIT**TO-252-5L:**

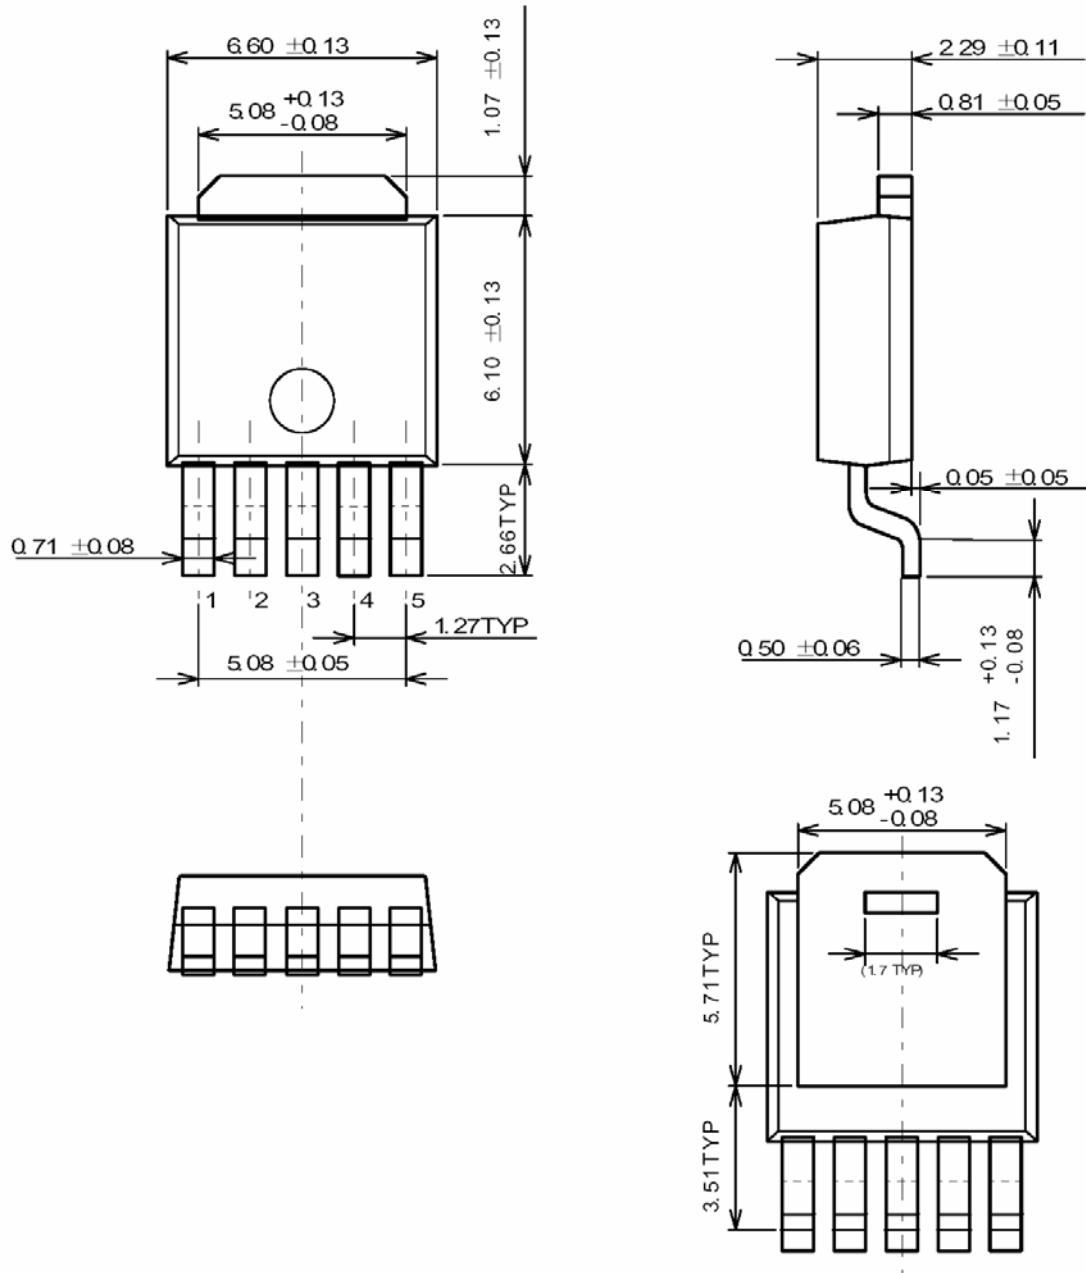

UNIT : mm

OUTLINE DRAWING

TO220F-4L

