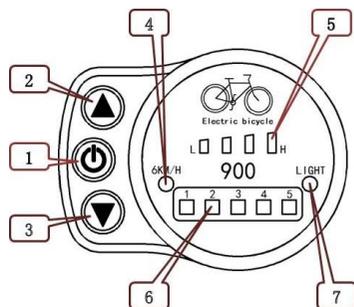Dear users, please read this guide carefully before you use KT-LED900 instrument. The manual will guide you use the instrument correctly to achieve a variety of vehicle control and vehicle status displays.

Functions and Display

| 1	⏻	ON/OFF button	5	Battery capacity indicator	4 LED Indicator
2	▲	UP button	6	Power ratio gear	Gear 5 LED Indicator
3	▼	DOWN button	7	LED indicator	Startup headlight
4	LED indicator	6KM/H boost function			

Operation

1. ON/OFF

Hold ⏻ button long to startup; hold ⏻ button long for a second time to turn off the meter. When the motor stops driving and when the meter is not used for a consecutive 5 minutes, it will automatically shut down and turn off the motor power supply.

2. Boot Display Interface

Hold ⏻ button long to startup and enter boot display interface.

2.1 Assist ratio gear switch

Hold ▲ or ▼ shortly to switch 1-5 file gear. Gear 1 is for the minimum power, gear 5 is for the highest power. Each startup will automatically restore the gear shutdown last time. Gear 0 (the indicators of five gears are off) is without power assist function.

2.2 6KM/H boost function

Hold ▼ button and LED indicator flashes, the vehicle drives at the speed should be no more than 6Km/h. Release ▼ button, the function is invalid.

2.3 Power Display

When battery power capacity is greater than 80%, all 4 LED indicator are lit. When the battery capacities drop, the indicators are off in order. When the power capacity is less than 20%, the last indicator is flashing (L side). When the controller is under-voltage protection, all 4 LED indicators are power off, which means that the vehicle is currently shutdown due to low voltage.
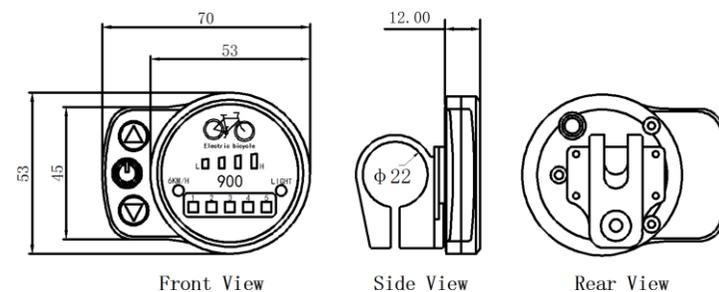
2.4 Startup headlights

Hold ▲ button long to startup the lights (the controller should have the function of headlight driving output or built-in meter headlight driving output function), LIGHT indicator lights. Hold ▲ button again to turn off vehicle headlights, and the LIGHT indicator is turned off.

Outlook and Size

1. Display dimension

Front View   Side View   Rear View

2. Wiring schematic

36V	Red
Control	Blue
GND	Black
Data1	Green
Data2	Yellow