
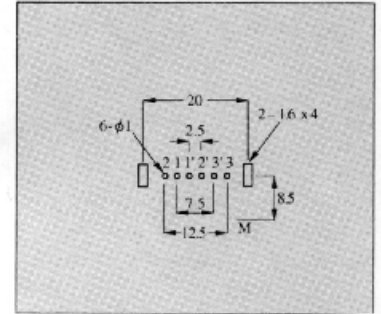
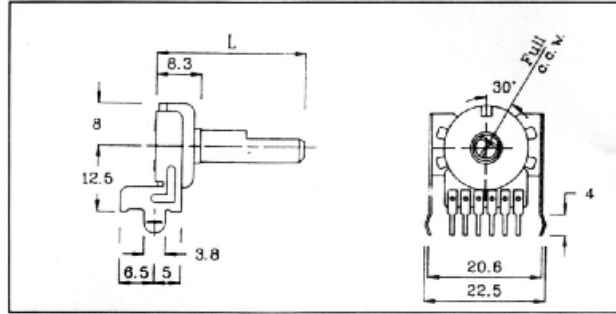


RV 1611GNP(PH)



SHAFT DIMENSION 軸尺寸

| TYPE | F | | | | | | K | | | | | |
|-----------------|---|------|------|------|------|------|---|------|------|------|------|------|
| DIMENSION | | | | | | | | | | | | |
| MODEL | | | | | | | | | | | | |
| RV 1611NP(PH) | L | 18.5 | 23.5 | 28.5 | 33.5 | 38.5 | L | 18.5 | 23.5 | 28.5 | 33.5 | 38.5 |
| RV 1611GNP(PH) | φ | 7 | 12 | 12 | 12 | 12 | φ | 7 | 12 | 12 | 12 | 12 |
| RV 1611NP(UPV) | L | 20 | 25 | 30 | 35 | 40 | L | 20 | 25 | 30 | 35 | 40 |
| RV 1611GNP(UPV) | φ | 7 | 12 | 12 | 12 | 12 | φ | 8 | 12 | 12 | 12 | 12 |
| RV 1612NP(PH) | L | 20 | 25 | 30 | | | L | 20 | 25 | 30 | | |
| RV 1612GNP(PH) | φ | 12 | 12 | 12 | | | φ | 12 | 12 | 12 | | |

SPECIFICATIONS 特性

| ELECTRICAL 電器特性 | | | |
|--|-----------------|----------------------|-------|
| RESISTANCE RANGE 阻值範圍 | 500Ω - 1MΩ | | |
| RESISTANCE TOLERANCE 阻值誤差 | ± 20% | | |
| RESISTANCE TAPER 電阻規律 | A. B. C. D. W | | |
| RESIDUAL RESISTANCE 殘留電阻 Between Terminal 1 & 2 Between Terminal 2 & 3 | SINGLE | 10Ω/10Ω | |
| | DUAL | 10Ω/20Ω | |
| POWER RATING 額定功率 | Travel Taper | SINGLE | DUAL |
| | | B | 0.1W |
| | Except B | 0.05W | 0.05W |
| INSULATION RESISTANCE 絕緣電阻 | SINGLE | 100MΩ Min at 500V DC | |
| | DUAL | 100MΩ Min at 250V DC | |
| WITHSTAND VOLTAGE 耐電壓 | SINGLE | 1 Min at 500V AC | |
| | DUAL | 1 Min at 300V AC | |

| MECHANICAL 機械特性 | |
|------------------------------------|-----------------|
| ROTATION ANGLE 旋轉角 | 300° ± 5° |
| ROTATIONAL TORQUE 旋轉力矩 | 20 - 200 gf. cm |
| CLICK FORCE 定位阻力 | 60 - 250 gf. cm |
| STOP STRENGTH 止擋強度 | 6 Kgf. cm |
| PUSH - PULL STRENGTH 推拉強度 | 8 Kgf |
| SHAFT WOBBLE 轉軸振幅 | 0.3 - 0.6 mm |
| SHAFT BENDING 轉軸偏心 | 0.35mm |
| BUSHING NUT TIGHTING STRENGTH 螺帽強度 | 10 Kgf. cm |
| ROTATIONAL NOISE 轉動噪音 | 47 (Mv) |

| DURABILITY 耐用性 | |
|-----------------------|---------------|
| ROTATIONAL LIFE 旋轉壽命 | 15,000 Cycles |

